

SUPERIOR PUMP

BUILT TO LAST

POOL DRAIN SERVICE UTILITY PUMP

MANUAL ON/OFF

91875 PUMP FEATURES

- Will fit inside most 8" pool drains (5-3/4" base size)
- Energy efficient 1/2 HP split capacitor motor.
- Lower amp draw, runs cooler, lasts longer
- Stainless steel construction
- Hermetically sealed, oil cooled motor for long pump life
- Stainless steel impeller
- 1-1/4" NPT top discharge
- Motor is thermally protected with automatic reset thermal protector
- Stainless steel motor shaft
- Stainless steel fasteners
- Large intake screen
- Acceptable for indoor or outdoor use
- Compact, lightweight design is easily portable
- Every unit is 100% pressure tested



1 YEAR
WARRANTY

5520
GALLONS PER HOUR

Designed to fit most 8" drains



POOL DRAIN SERVICE UTILITY PUMP

MANUAL ON/OFF



230584

91875 - Application

Submersible pool drain service pump designed to fit inside of a 8" pool drain.


Motor Specifications

Horsepower	1/2 HP
Voltage	120
Amps	11.4
Hertz	60 Hz
Phase	Single
RPM	3450 RPM
Motor Type	Permanent Split Capacitor (PSC)
Insulation	Class A
Circuit Requirements	15 amp (min) individual circuit
Duty Rating	Continuous
Shaft Seal	Carbon/ceramic and stainless steel
Motor Shaft	Stainless Steel
Upper Motor Bearing	Ball Bearing
Lower Motor Bearing	Ball Bearing
Motor Protection	Auto reset thermal overload protector

Pump Specifications

Discharge Size	1-1/4" NPT
Cord Length	25'
Cord Type	SJTW, UL listed, 3-wire, 18 gauge
Pump Housing	Stainless Steel
Pump Base	Stainless Steel
Impeller Material	Stainless Steel
Impeller Type	Non-clogging
Gasket	Buna-N
Solids Handling	1/2" spherical
Liquid Temp. Range	32° - 120° F
Operation	Non-automatic
Fasteners	Stainless steel
Max Flow Rate	92 Gallons per minute
Maximum Head	35 feet
Max Pressure	10.8 psi
Weight	15.5 lbs
Max intake width	5-1/2"

Performances

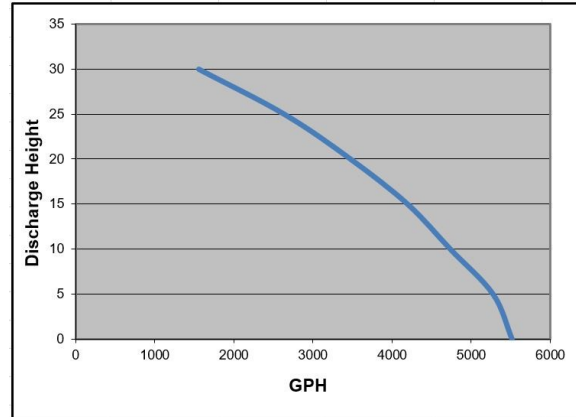

Discharge Height	0'	5'	10'	15'	20'	25'	30'
Gallons Per Minute	92	88	79	70	58	44	26
Gallons Per Hour	5520	5280	4740	4200	3480	2640	1560

Dimensions

